



Name: Recommended **Date:** 07/11/2017 **Event:** Indoor and Outdoor Dirt

Track: Indoor Outdoor **Size:** Small Medium Large **Traction:** Low Med High

Surface: Smooth Bumpy Rutted **Type:** Loose/Loamy Hard Pack Blue Groove Clay

Bumpsteer/Ackerman/Servo Saver:



Condition: Dusty Dry Wet Muddy

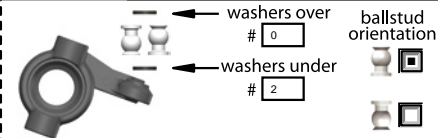

Shocks:

	FRONT	REAR
OIL	450	300
BRAND	PT	PT
PISTON	8x1.4 Conical	8x1.4 Conical
SPRING	Orange (TKR6106)	Green (TKR6114)
REBOUND	0 %	0 %
STD/EMUL/VENT	Emulsion	Emulsion

Front End:

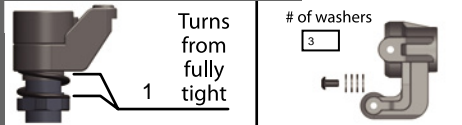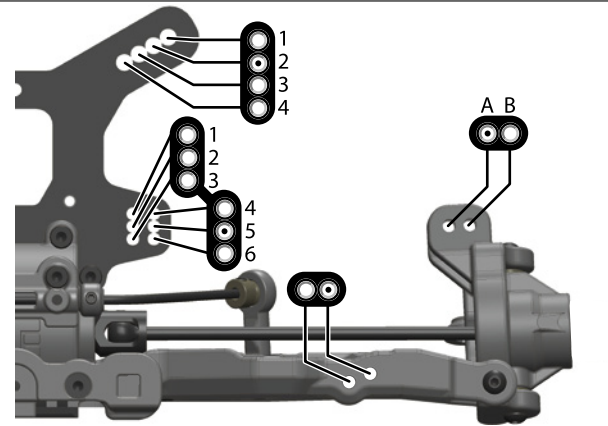

Suspension:

	FRONT	REAR
RIDE HEIGHT	19	19
CAMBER	-1	-2
CASTER		
SWEEP		
KICK UP		
ANTI-SQUAT		
TOE (in/out)	0 at full droop	
SWAY BAR	2.6	2.4
SHOCK LENGTH (DROOP)	107	121

Tires/Wheels:

	FRONT	REAR
BRAND/TREAD		
COMPOUND		
INSERT		
WHEEL		

NOTES: TKR6018 Shock Caps Bleed Twice

NOTES:

Differential Oil:

	FRONT	CENTER	REAR
	15	15	10

Electronics:

ESC:	Tekin RX8 Gen2
Battery:	Throttle frequency 12k and power 7
Motor:	Tekin Pro4 HD 4300
Radio:	Use dual rate to turn down steering
Servo:	if it is too sensitive.

Drivetrain:

PINION SIZE	17	(teeth)
-------------	----	---------

Chassis Braces:

Front	<input checked="" type="checkbox"/>	Middle	<input type="checkbox"/>	Rear	<input type="checkbox"/>
(front brace is always recommended)					


Notes:

- TKR6051 pistons and drill them to 1.4mm
- TKR8104 and TKR8100 Steering
- TKR5545B Hubs

"A" Block
(0° WITH CENTER DOT INSERT)
Composite Aluminum

"B" Block
(10° WITH CENTER DOT INSERT)
Composite Aluminum

Rear End:


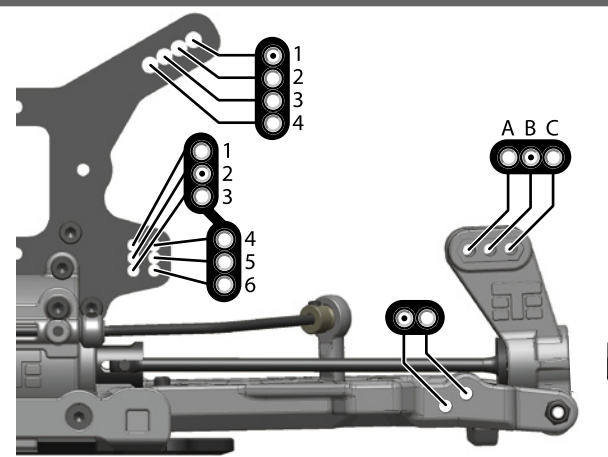


"C" Block
(3° WITH CENTER DOT INSERT)
Composite Aluminum (-1°)

"D" Block
(3° WITH CENTER DOT INSERT)
Composite Aluminum

Body/Mounts:

BODY MAKE: Jconcepts Illuzion

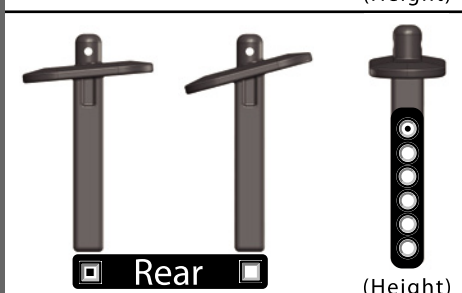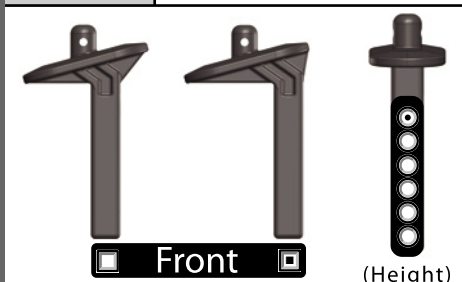

Wheelbase:

